

modelo **TR-1**




Capacidad: 500 – 1000 – 2000 – 3200 – 6300 – 10000 kg
Capacity:

3000 divisiones OIML-R60
3000 divisions OIML-R60

Soporte elástico de acero aleado
Measuring element from steel alloy

Tratamiento anticorrosión de níquel químico
Protected against corrosion by nickel-plated treatment

Estanqueidad IP-67
Protected against humidity IP-67

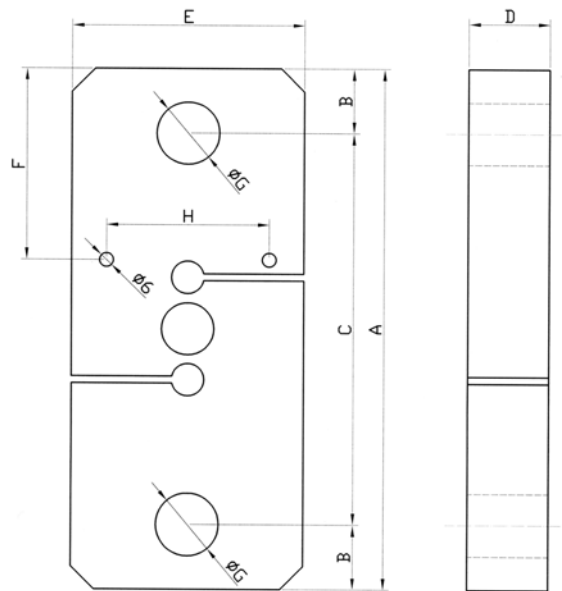

Capacidad [kg]	500	1000	2000	3000	6300	10000
A	183	183	183	194	216.5	240
B	24.25	24.25	24.25	24	28	33
C	134.5	134.5	134.5	146	160.5	174
D	19	19	19	27	35	43
E	50	50	60	60	80	80
F	61.5	61.5	61.5	66	78	88
G	φ17.5	φ17.5	φ17.5	φ21	φ27.5	φ36.5
H	38	38	38	38	38	38

Características técnicas:

- Clase de precisión
- Sensibilidad
- Vmin
- Tensión de alimentación
- Resistencia de entrada
- Resistencia de salida
- Margen de temperatura compensado
- Resistencia de aislamiento


Dimensiones en mm

C3
 $2 \pm 0.1\% \text{ mV/V}$
 $E_{\text{max}}/10000$
 $5 \pm 15 \text{ V}$
 $390 \pm 3 \Omega$
 $350 \pm 3 \Omega$
 $-10^\circ \text{C} / +40^\circ \text{C}$
 $> 5000 \text{ M}\Omega$

Technical Data:

Accuracy class -
Rated output -
Vmin -
Excitation Voltage -
Input Resistance -
Output resistance -
Temperature limits OIML R60 -
Insulation resistance -

Conexión/Connections

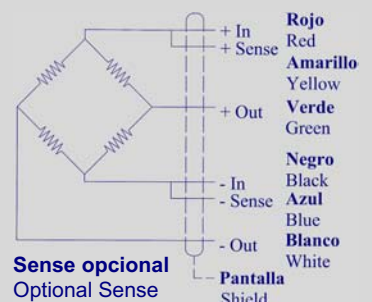

SENSOCAR
CÉLULAS DE CARGA • LOAD CELLS
ELECTRÓNICA DE PESAJE

Pol. Ind. Can Parellada C/ Géminis, 77 – 08228 Terrassa
Tel.: 34 93 780 44 99 – Fax: 34 93 780 39 72
www.sensocar.com – e-mail: sensocar@sensocar.com